



Y-CHECK VALVE THREADED, DN15, PN40, AISI316/AISI316/PTFE

Description

Y-type, Stainless Steel body, spring loaded lift check valve with PTFE soft sealing.
Screwed cap. BSPP female threaded ends.

Standard & Design

Material Body	Stainless Steel
Material Sealing Parts	Stainless Steel
Material Liner	Polymer Based
Pressure rating	PN40
Connection	PN40
Size	DN15
Standard	DIN
Item number	60-00000606
Item ID	330-3207
Model number	471494

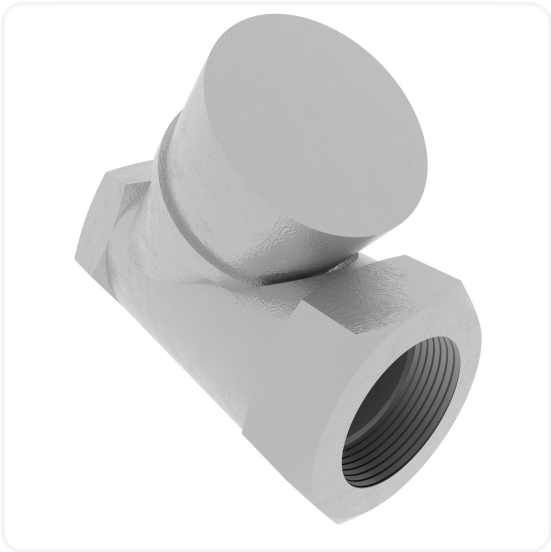

Parts list

No	Part	Material	Code	Comment
1	Body	Stainless Steel	ASTM A351-CF8M	
2	Cap	Stainless Steel	ASTM A351-CF8M	
3	Disc	Stainless Steel	AISI 316	
4	Gasket	PTFE		
5	Seal	PTFE		
6	Spring	Stainless Steel	AISI 316	

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-13



Item data

Item number	60-00000606
Pressure rating	PN40
Connection	PN40
B	27
DN	15
H	37.4
Kg	0.2
L	65.8
ØA	17.5
Hcd	65
Inch	1/2"
ØD	12.5

Variants

Meson Group's product offering is larger than displayed here. We have the capability to tailor-make products according to customer needs. Please access a resembling product through www.mesongroup.com and click "Add with note", to request a customized product.

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-13

