




BUTTERFLY VALVE VULCANIZED LINER DOUBLE FLANGED, BARE STEM, DN50, ANSI150, GGG40.3/C958/NBR

Description

Standard & Design

Material Body	Ductile Iron
Material Disc	Copper Alloy
Material Liner	NBR
Actuation	Bare Stem Parallel
Pressure rating	ANSI150
Connection	ANSI150
Size	DN50
Standard	ANSI
Face to face standard	EN 558, series 13
Min temp Op / peak	-15°C / -25°C
Max temp Op / peak	+80°C / +95°C
Item number	M34990
Item ID	703-1312
Model number	730703

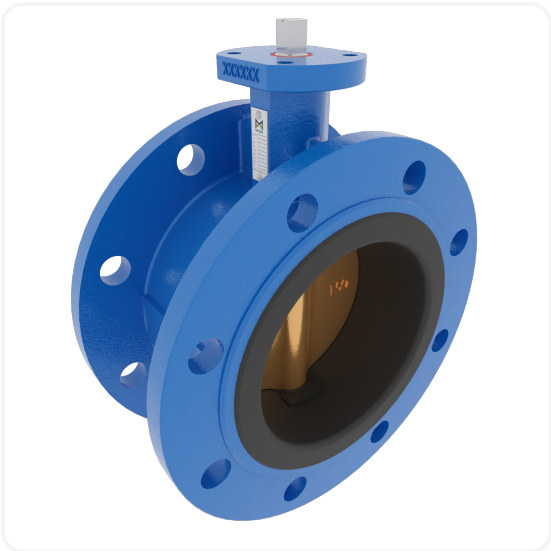

Parts list

No	Part	Material	Code	Comment
1	Body	Nodular Cast Iron	GGG40.3	
2	Disc	Aluminium Bronze	CC333G	
3	Seat	NBR	NBR	
4	Stem	Stainless Steel	AISI431	
5	Pin	Duplex	1.4462	

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-14



Item data

Item number	M34990
Pressure rating	ANSI150
Connection	ANSI150
DN	50
H3	19
Hcd	121
Inch	2"
nxød	4x20
ISO5211	F05/F07

Variants

Meson Group's product offering is larger than displayed here. We have the capability to tailor-make products according to customer needs. Please access a resembling product through www.mesongroup.com and click "Add with note", to request a customized product.

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-14

