






BUTTERFLY VALVE VULCANIZED LINER LUG, BARE STEM, DN450, PN10, GS-C25/C958/NBR

Description

Standard & Design

Material Body	Cast Steel
Material Disc	Copper Alloy
Material Liner	NBR
Actuation	Bare Stem Parallel
Pressure rating	PN10
Connection	PN10/JIS10K
Size	DN450
Standard	JIS
Face to face standard	EN 558, series 20
Min temp Op / peak	-15°C / -25°C
Max temp Op / peak	+80°C / +95°C
Item number	40-00003231
Item number prod	BF01497400
Item ID	701-0683
Model number	710761

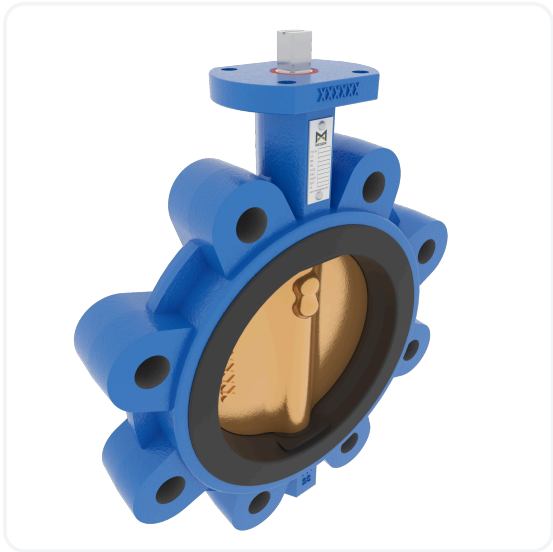

Parts list

No	Part	Material	Code	Comment
1	Body	Cast Steel	GS-C25	
2	Disc	Aluminium Bronze	CC333G	
3	Seat	NBR	NBR	
4	Stem	Stainless Steel	AISI431	
5	Pin	Duplex	1.4462	
6	Gland packing	PTFE		
7	Bonnet gasket	Asbestos Free		
8	Indicator	Bronze	CC 491K	
9	Handwheel	Cast Iron	GG25	

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-14



Item data

Item number	40-00003231
Pressure rating	PN10
Connection	PN10/JIS10K
DN	450
H1	335
H2	375
H3	38
Hcd	565
Kg	124
L	114
nxød	20xM24
S	36
ØD2	175
Inch	18"
ISO5211	F14

Variants

Meson Group's product offering is larger than displayed here. We have the capability to tailor-make products according to customer needs. Please access a resembling product through www.mesongroup.com and click "Add with note", to request a customized product.

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-14

