



Y-CHECK VALVE THREADED, AISI316/AISI316/PTFE

Description

Y-type, Stainless Steel body, spring loaded lift check valve with PTFE soft sealing. Screwed cap. BSPP female threaded ends.

Standard & Design

Material Body	Stainless Steel
Material Sealing Parts	Stainless Steel
Material Liner	Polymer Based
Standard	DIN
Model number	471494

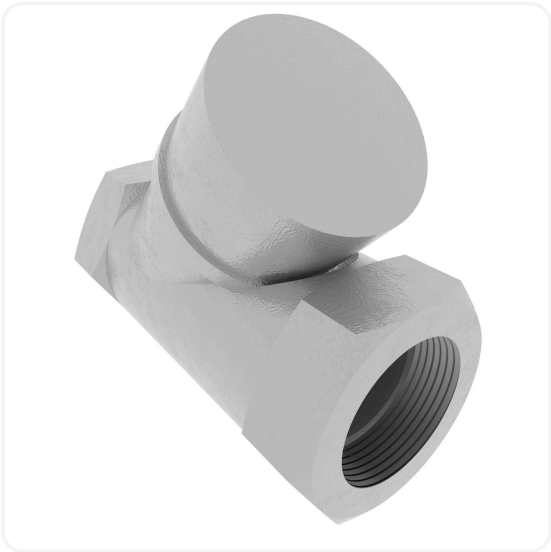

Parts list

No	Part	Material	Code	Comment
1	Body	Stainless Steel	ASTM A351-CF8M	
2	Cap	Stainless Steel	ASTM A351-CF8M	
3	Disc	Stainless Steel	AISI 316	
4	Gasket	PTFE		
5	Seal	PTFE		
6	Spring	Stainless Steel	AISI 316	

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-13



ITEMS

PN40

Item No.	Connection	DN	L	H	ØA	B	Kg
60-00000604	PN40	8	65.8	37.4	11	27	0.3
60-00000605	PN40	10	65.8	37.4	14	27	0.3
60-00000606	PN40	15	65.8	37.4	17.5	27	0.2
60-00000607	PN40	20	75.7	44.6	23	32.3	0.4
60-00000608	PN40	25	89.7	56.9	29	41	0.7
60-00000609	PN40	32	109.8	64.2	38	50	1.2
60-00000610	PN40	40	121	76	44	55.5	1.5
60-00000611	PN40	50	151.6	87	56	70	2.8

Variants

Meson Group’s product offering is larger than displayed here. We have the capability to tailor-make products according to customer needs. Please access a resembling product through www.mesongroup.com and click “Add with note”, to request a customized product.

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-13

