


BALL VALVE 3-WAY FLANGED T-PORT, DIRECT, LEVER, DN15, PN16, AISI316/AISI316/PTFE

Description

3-way, full bore, Stainless Steel body ball valve with Stainless Steel ball and PTFE seat.
Raised face flanges. With direct mouting pad.

Standard & Design

Material Body	Stainless Steel
Material Ball	Stainless Steel
Material Seat	Polymer Based
Execution	Direct
Actuation	Lever
Pressure rating	PN16
Connection	PN16
Size	DN15
Standard	DIN
Item number	20-00000820
Item ID	520-3423
Model number	448192

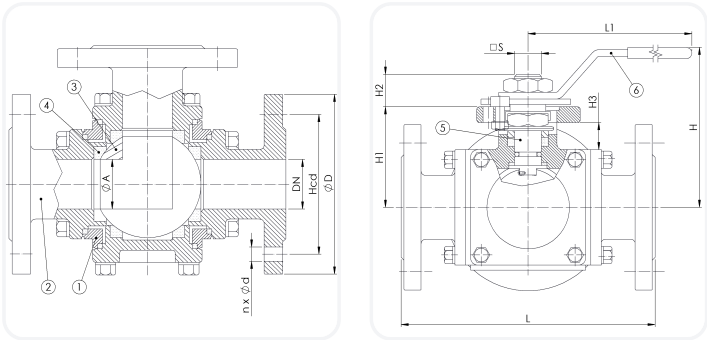

Parts list

No	Part	Material	Code	Comment
1	Body	Stainless Steel	A351 Gr. CF8M	
2	Cap	Stainless Steel	A351 Gr. CF8M	
3	Ball	Stainless Steel	SS 316	
4	Seat	PTFE		
5	Stem	Stainless Steel	SS 316	
6	Handle	Stainless Steel, Vinyl Cover	SS 304	

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-14



Item data

Item number	20-00000820
Pressure rating	PN16
Connection	PN16
DN	15
H	62
H1	41
H2	11
H3	10
Kg	4.4
L	160
L1	130
S	9
ØA	15
Hcd	65
Inch	1/2"
nxød	4x14

Variants

Meson Group's product offering is larger than displayed here. We have the capability to tailor-make products according to customer needs. Please access a resembling product through www.mesongroup.com and click "Add with note", to request a customized product.

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-14

