






BUTTERFLY VALVE VULCANIZED LINER LUG, BARE STEM, GGG40.3/1.4469/EPDM

Description

Nodular Cast Iron body, vulcanized liner wafer type butterfly valve with Super Duplex disc. Centric free stem with standardized pattern for actuator mounting. Can handle negative pressure (vacuum), due to the meticulous vulcanization process.

Standard & Design

Material Body	Ductile Iron
Material Disc	Stainless Steel
Material Liner	EPDM
Actuation	Bare Stem Parallel
Standard	DIN
Face to face standard	EN 558, series 20
Min temp Op / peak	-25°C / -35°C
Max temp Op / peak	+100°C / +125°C
Model number	711803;711802;711801;711800

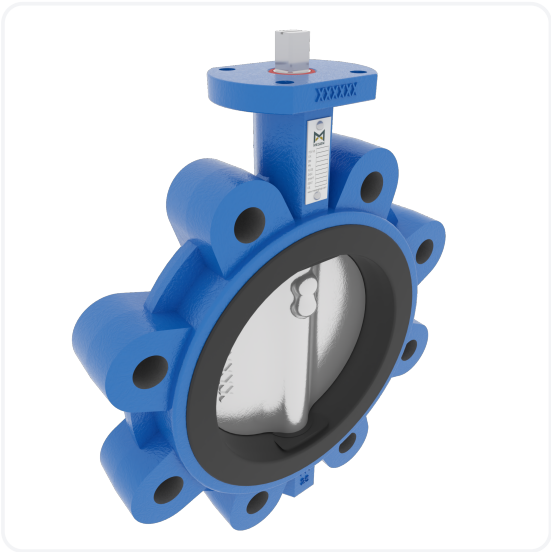

Parts list

No	Part	Material	Code	Comment
1	Body	Nodular Cast Iron	GGG40.3	
2	Disc	Duplex	1.4469	
3	Seat	EPDM	EPDM	
4	Stem	Stainless Steel	AISI431	
5	Pin	Duplex	1.4462	

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-14



ITEMS

PN16

Item No.	Connection	DN	nxød	Hcd	ØD2	L	H1	H2	H3	S	Kg
M95456	PN16	40	4xM16	110	90	33	66	113	19	11	2.1
M95457	PN16	50	4xM16	125	90	33	66	113	19	11	3.5
M95458	PN16	65	4xM16	145	90	46	80	126	19	11	4.4
M95459	PN16	80	8xM16	160	90	46	88	133	19	11	5.5
M95460	PN16	100	8xM16	180	90	52	106	147	19	11	7.4
M95461	PN16	125	8xM16	210	90	56	118	160	19	14	10
M95462	PN16	150	8xM20	240	90	56	140	180	19	14	13
M95487	PN16	200	12xM20	295	90	60	167	204	25	17	16

PN10

Item No.	Connection	DN	nxød	Hcd	ØD2	L	H1	H2	H3	S	Kg
M95463	PN10	200	8xM20	295	90	60	167	204	25	17	19
M95464	PN10	250	12xM20	350	125	68	203	245	30	22	31
M95465	PN10	300	12xM20	400	125	78	228	270	30	22	43
M95466	PN10	350	16xM20	460	150	78	288	315	30	27	54
M95467	PN10	400	16xM24	515	150	102	305	350	30	27	91
M95468	PN10	450	20xM24	565	175	114	335	375	38	36	124
M95469	PN10	500	20xM24	620	175	127	379	415	38	36	169
M95470	PN10	600	20xM27	725	210	154	431	465	48	46	211

PN10 – Special Top Flange/Spindle

Item No.	Connection	DN	nxød	Hcd	ØD2	L	H1	H2	H3	S	Kg
40-00003046	PN10	600	20xM27	725	210	154	431	465	48	36	211

PN6 – Special Top Flange/Spindle

Item No.	Connection	DN	nxød	Hcd	ØD2	L	H1	H2	H3	S	Kg
40-00003063	PN10	450	20xM24	565	175	114	335	375	38	36	124
40-00003067	PN10	800	24xM30	950	300	190	545	620	57	46	410

PN4 – Special Top Flange/Spindle

Item No.	Connection	DN	nxød	Hcd	ØD2	L	H1	H2	H3	S	Kg
40-00003055	PN10	250	12xM20	350	125	68	203	245	25	17	31

Variants

Meson Group's product offering is larger than displayed here. We have the capability to tailor-make products according to customer needs. Please access a resembling product through www.mesongroup.com and click "Add with note", to request a customized product.

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-14

