




BUTTERFLY VALVE VULCANIZED LINER DOUBLE FLANGED, BARE STEM, DN65, PN16, GGG40.3/C958/FKM

Description

Standard & Design

Material Body	Ductile Iron
Material Disc	Copper Alloy
Material Liner	FKM
Actuation	Bare Stem Parallel
Pressure rating	PN16
Connection	PN16
Size	DN65
Standard	DIN
Face to face standard	EN 558, series 13
Min temp Op / peak	-10°C / -20°C
Max temp Op / peak	+160°C / +180°C
Item number	M34734
Item number prod	BF03473400
Item ID	703-1253
Model number	732702

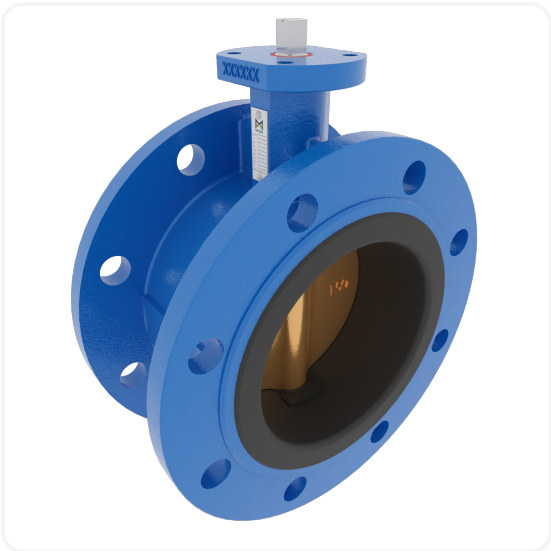

Parts list

No	Part	Material	Code	Comment
1	Body	Nodular Cast Iron	GGG40.3	
2	Disc	Aluminium Bronze	CC333G	
3	Seat	FKM	FKM	
4	Stem	Stainless Steel	AISI431	
5	Pin	Duplex	1.4462	

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-13



Item data

Item number	M34734
Pressure rating	PN16
Connection	PN16
DN	65
H1	80
H2	126
H3	19
Hcd	145
Kg	8.3
L	112
nxød	4x18
S	11
ØD2	90
Inch	2 1/2"
ISO5211	F05/F07

Variants

Meson Group's product offering is larger than displayed here. We have the capability to tailor-make products according to customer needs. Please access a resembling product through www.mesongroup.com and click "Add with note", to request a customized product.

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-13

