




BUTTERFLY VALVE VULCANIZED LINER DOUBLE FLANGED, BARE STEM, GGG40.3/C958/FKM

Description

Standard & Design

Material Body	Ductile Iron
Material Disc	Copper Alloy
Material Liner	FKM
Actuation	Bare Stem Parallel
Standard	DIN
Face to face standard	EN 558, series 13
Min temp Op / peak	-10°C / -20°C
Max temp Op / peak	+160°C / +180°C
Model number	732703;732702;732701;732700

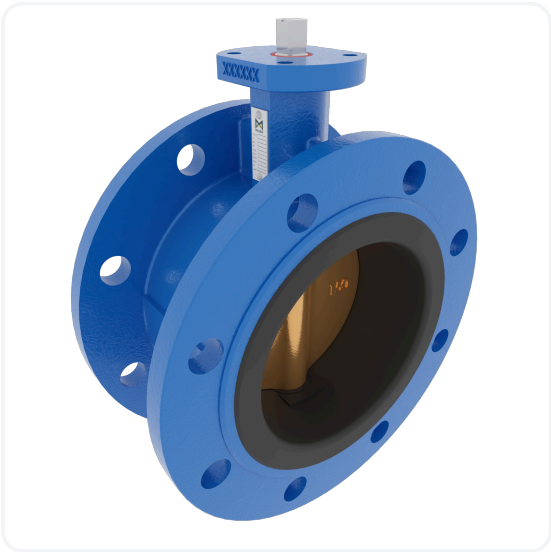

Parts list

No	Part	Material	Code	Comment
1	Body	Nodular Cast Iron	GGG40.3	
2	Disc	Aluminium Bronze	CC333G	
3	Seat	FKM	FKM	
4	Stem	Stainless Steel	AISI431	
5	Pin	Duplex	1.4462	

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-14



ITEMS

PN16

Item No.	Connection	DN	nxød	Hcd	ØD2	L	H1	H2	H3	S	Kg
M34732	PN16	40	4x18	110	90	106	66	113	19	11	5.5
M34733	PN16	50	4x18	125	90	108	71	118	19	11	6.7
M34734	PN16	65	4x18	145	90	112	80	126	19	11	8.3
M34735	PN16	80	8x18	160	90	114	88	133	19	11	9
M34736	PN16	100	8x18	180	90	127	106	147	19	11	11
M34737	PN16	125	8x18	210	90	140	118	160	19	14	15
M34738	PN16	150	8x22	240	90	140	140	180	19	14	18
M34739	PN16	200	12x22	295	90	152	167	204	25	17	26

Variants

Meson Group’s product offering is larger than displayed here. We have the capability to tailor-make products according to customer needs. Please access a resembling product through www.mesongroup.com and click “Add with note”, to request a customized product.

Measures are in mm. Weights are approximate. The information provided may contain errors or omissions, and no rights may be derived from its content. Meson Group reserves the right to update information at any time without prior notice. For the latest revision, always consult www.mesongroup.com. Document created 2026-08-14

